Assembly instructions for mirror cabinets




Important information for assembling our bathroom furniture.
Please read carefully before assembly and keep for future reference.

intarbad®

Assembly instructions for mirror cabinets

Please check your bathroom furniture for possible damage before starting assembly.
We cannot accept complaints about damage to furniture parts that have already been assembled!

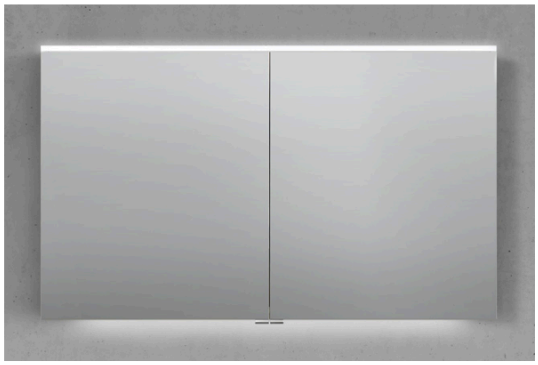

The product image is illustrative and may differ from the model ordered.

Safety instructions:
- **Assembly may only be carried out by qualified persons.**
- **The fixings (screws and wall plugs) are designed only for solid walls with sufficient load-bearing capacity.**
- **Before drilling, ensure there are no cables or pipes in the mounting area of the wall.**
- **Electrical installation must only be carried out by a qualified electrician.**
- **Mirror cabinets/illuminated mirrors with electrical fittings must be at least 60 cm from a bath or shower.**


Installing mirror cabinets

- **Remove the glass door hinges from the cabinet body (Fig. 1 – Removal).**
- **Fit the glass door hinges to the mirror doors (click the hinge into the adhesive plate and open it) (Figs. 1a + 1b – Fitting / Opening).**
- **Please note: A 20 cm mirror door uses one spring-loaded hinge (Fig. 6 – Supplied parts) and one hinge without a spring (Fig. 5 – Supplied parts).**
- **Determine the cabinet position on the wall and mark the mounting plates and drill holes. Separate the supplied mounting plates at the predetermined breaking points to obtain 2 plates (Fig. 7 – Supplied parts). Secure the plates as close to the wall as possible.**
- **Fit the surface-mounted LED light to the top of the mirror cabinet using the screws supplied.**
- **Connect the LED light to the transformer. Electrical installation must only be carried out by a qualified electrician.**
- **Carefully place the mirror cabinet onto its mountings, then align and secure it (Figs. 2a + 2b). Ensure that the round suspension screw is correctly engaged in the mounting plate (Fig. 2a).**
- **Fit the anti-tip device. Depending on the design, use option 1 (Figs. 15 + 16 + 17 – Supplied parts) or option 2. NOTE: Only required for models with a door width of 20 cm.**
- **Cover the adjustment screws/holes in the back panel with the supplied caps (Fig. 8 – Supplied parts).**
- **Insert the glass shelf supports into the designated holes and slide in the glass shelf (Fig. 9 – Supplied parts).**
- **Choose the position of the magnetic strip and attach it (Fig. 10 · Supplied parts).**
- **Fit and align the mirror doors (Fig. 1 – Fitting; Fig. 3 – Adjustment).**

Assembly instructions for mirror cabinets

Installing mirror cabinets

• Fit the door dampers to the upper hinges (Fig. 4 – Fitting; Fig. 11 – Supplied parts).
• Cover the hinge adjustment screws with the supplied caps (Fig. 12 – Supplied parts).
• Stick the mirror door handles onto the doors approximately 1 mm from the edge (Fig. 13 – Supplied parts).

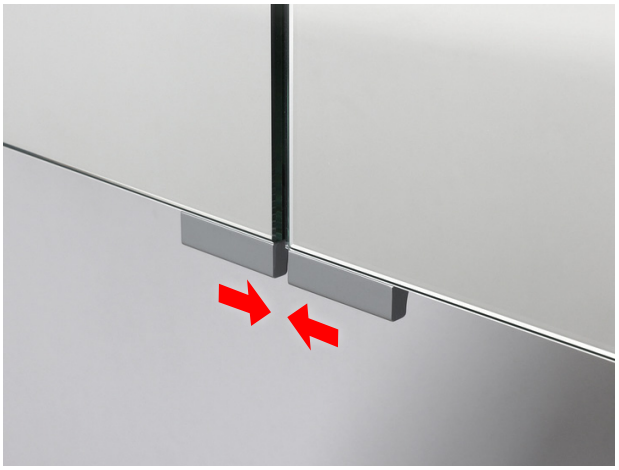


• Choose the position for the magnifying mirror and attach it. We recommend the inside of a mirror door (Fig. 14 – Supplied parts). Make sure it is not fitted at the same height as the glass shelf.

Assembly instructions for mirror cabinets

Anti-tip protection for the mirror cabinet
Option 1: Bracket fixing

Fig. 15+16+17

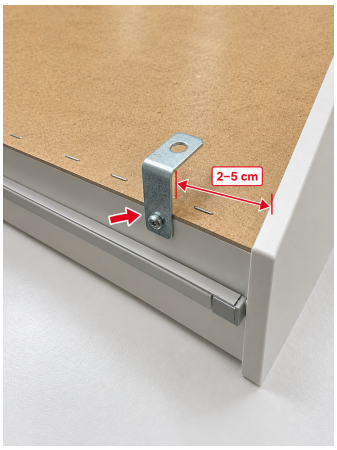






1. Mount and align the cabinet on the wall using the cabinet hangers.
2. Hold the bracket against the cabinet and wall and mark the fixing points.
3. Remove the cabinet from the wall.
4. Hold the bracket at the marked position and mark the drill hole on the wall.
5. Drill the hole.
6. Fix the bracket to the wall using a suitable screw.
7. Remount and align the cabinet on the wall using the cabinet hangers.
8. Fix the bracket to the cabinet.

Option 2: Securing with silicone

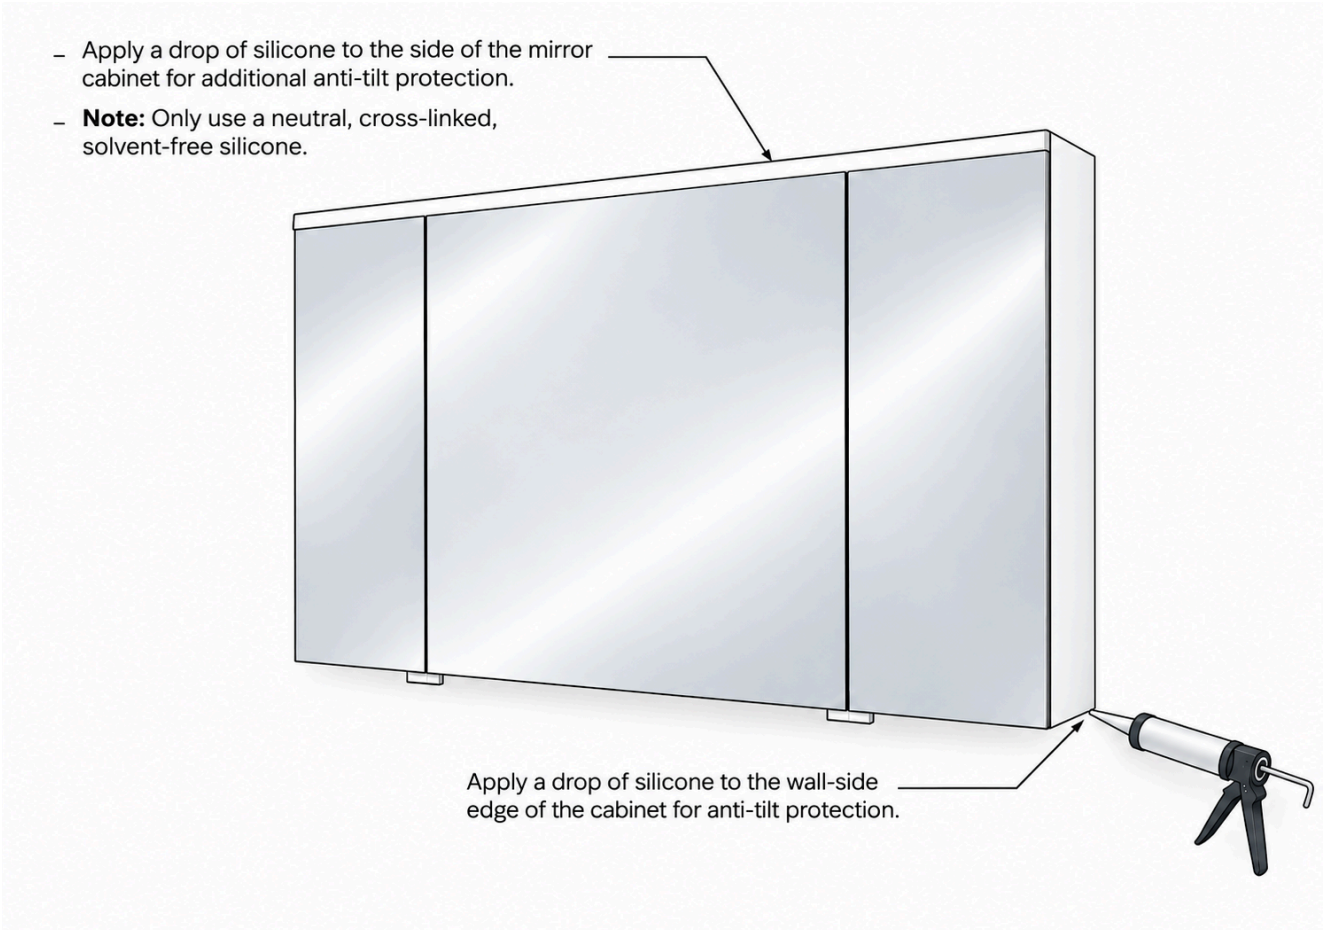

The product image is illustrative and may differ from the model ordered.

Assembly instructions for mirror cabinets

Fig. 1 | Removing and fitting glass door hinges

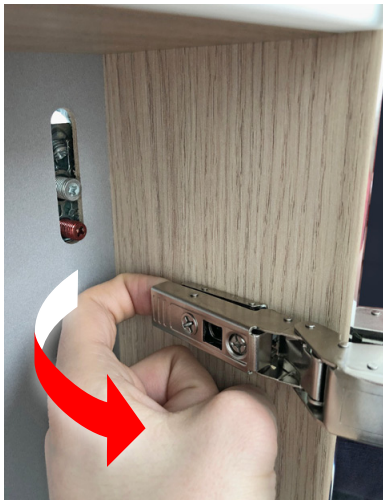


Fig. 1a | Removal



Fig. 1b | Fitting / opening




Fig. 1c | Fitting the mirror door

Fig. 2 | Cabinet hanger for mirror cabinet



Assembly instructions for mirror cabinets

Fig. 2a | Cabinet hanger with mounting rail

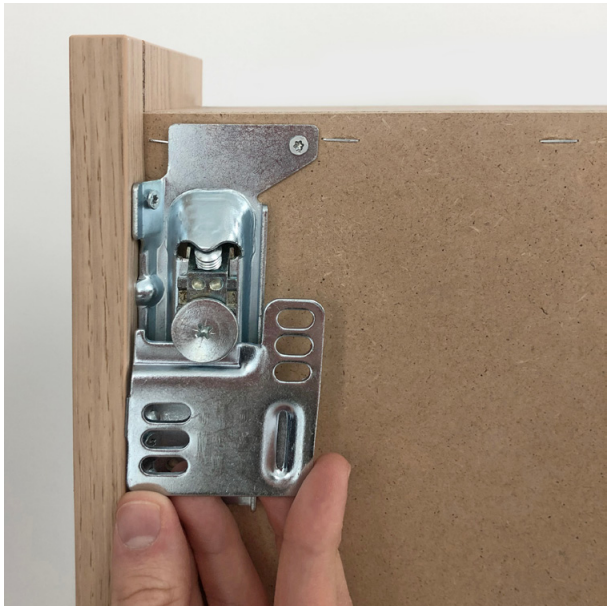

left



right

Fig. 2b | Adjusting cabinet hangers



Height adjustment
Turn left – down
Turn right – up



Depth adjustment



Securing to the mounting plate

Assembly instructions for mirror cabinets

Fig. 3 | Adjusting hinges



Left/right adjustment




Height adjustment



Depth adjustment

Fig. 4 | Fitting glass door dampers and cover caps



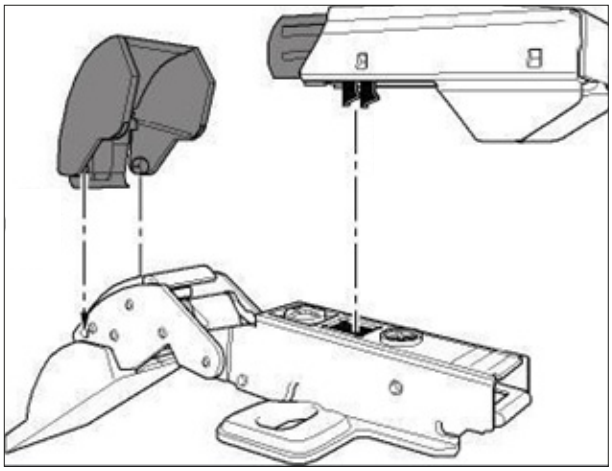

Assembly instructions for mirror cabinets

Supplied parts / assembly accessories

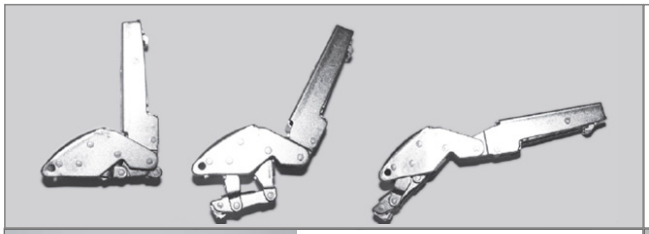


Fig. 5
1 hinge without spring per 20 cm mirror door



Fig. 6
2 spring-loaded hinges per mirror door



Fig. 12
1 cover cap per door for the hinge without door damper



Fig. 7
Mounting plates (separate)
8 mm screws
8 mm wall plugs

Dübel 8 mm



Fig. 13
1 handle per door



Fig. 8
1 cover cap per cabinet hanger



Fig. 14
1 magnifying mirror per mirror cabinet
(optional)



Fig. 9
6 glass shelf supports per glass shelf
2 glass shelves per compartment



Fig. 15
2 anti-tip brackets per mirror cabinet



Fig. 10
1 magnetic strip per mirror cabinet
(can be cut to size)




Fig. 16
2 screws and 2 wall plugs per mirror cabinet for fixing the brackets to the wall



Fig. 11
1 door damper per door
(grey cover cap + grey attachment)



Fig. 17
2 screws per mirror cabinet for fixing the brackets to the cabinet